

SU-2000 Updating the System

When should I update the system?

There are some very new devices which will be released by IC manufacturer from time to time, and those device were not supported in the system at the first time. If you have to use these new device, you have to update the system.


Note: *The updating program can not run under Windows 3.1 .

***The system update won't execute unless the SU-2000 and module are the version after 2.00.**

Before Updating

You have to setting up the software before updating the system. Insert CD-ROM and it will auto run the setup program. Click System Update then you are ready to update the system as shown like following picture.


Note: Run \GandPrj.EXE in root path if CD-ROM can not auto run.

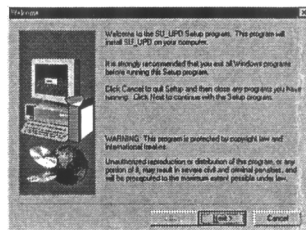

Updating the system

1. Start the program


Click SU_Update to run the program, it will show the following picture.

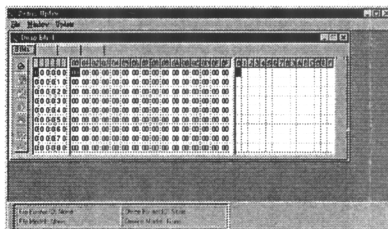

2. Load the file

(1) Click the button  on the Dump Edit or select Load File in File on Menu Bar to open the dialog of Load File.

(2) Type the file name or click Browse to choose the file name.

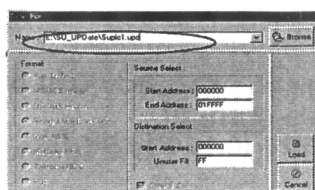

(3) Click Load button to load the file into Dump Edit and the program will check the file format at the same time. If the file format and check sum are examined correctly, it will show you a message at the bottom of the screen like following picture.

Note: The file you are ready to load-in must be the specific updating file format. If not, you can go any further procedures.



3. Set the Hardware Updating condition

SU2000 SYSTEM
VERSION 2.xx
Press [C] to Utility

After all the check, now you can set the SU- 2000 updating condition. Turn the power on and press [C] immediately so that you can go into updating condition. The screen is shown like following.


WAIT PC...
PRESS [ESC] TO RET

Now you can update the system through software.


4. Start to update

Select Update then run the system will start to update. There are three steps to go through.


(1) Initial step



(2) Update

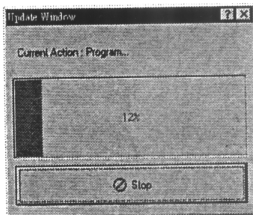

(3) Verify data

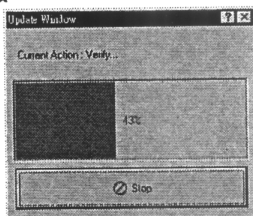

When the procedures have been done, the program will show you the instrctive.

UPDATE OK!!

Error Messages

(a) The updating process is not allowed to proceed. You might work with the wrong procedure. Please refer to the user's manual.

Please make sure you have already loaded the file. Or check "Updating the System" in the instruction.

(b) Not found hardware

The SU-2000 has not been connected. Please make sure the hardware is connected well on the printer port and the version is after 2.00.

(c) The ID(identification) number of the file format is not correspondent to the current module.

The updating file is not correspondent to the module. The program will still run the updating procedure if you click OK. But this move is not recommended. Please click CANCEL, find the right file and do the procedure of Loading the File again.